

POCKET DOOR SYSTEM

Elegance, functionality and space optimization.



Features

- **Allows for Smooth Lateral Assisted Soft Closing**
- **Custom Made to Order for Proper Fitting**
- **Cushioned Soft Closing Mechanism that allows for Uniform Motion**
- **For Doors up to 98-7/16" (2500mm) Ht. and 36-7/16" (Width), up to 66 lbs.**
- **Door Projection-4-3/16" (107mm) in Open Position**
- **For Use with Solid and Frame Doors**
- **All Adjustments are from the Front of the Cabinet**

Maywood, IL
1401 St. Charles Rd.
Maywood, IL 60153
P: 708.343.1515
F: 708.343.1616


Rockford, IL
1931 Eleventh St.
Rockford, IL 61104
P: 815.968.0921
F: 815.968.4720

Indianapolis, IN
6350 Brookville Rd.
Indianapolis, IN 46219
P: 317.353.6281
F: 317.356.3503

White Bear Lake, MN
4250 Otter Lake Rd.
White Bear Lake, MN 55110
P: 651.407.2800
F: 651.407.2801

Horn Lumber
4700 West 19th St.
Cicero, IL 60804
P: 773.847.7397
F: 773.847.7798

- 1 Cam-assisted door insertion and extraction movement.
- 2 Magnetic buffer for soft insertion.
- 3 Slide-in installation to facilitate installation and removal of the mechanism from the front.
- 4 Sliding carriage.
- 5 Quick coupling hinges.
- 6 All adjustments are accessible from the front of the cabinet.
- 7 Profile cover caps (included in the standard versions).

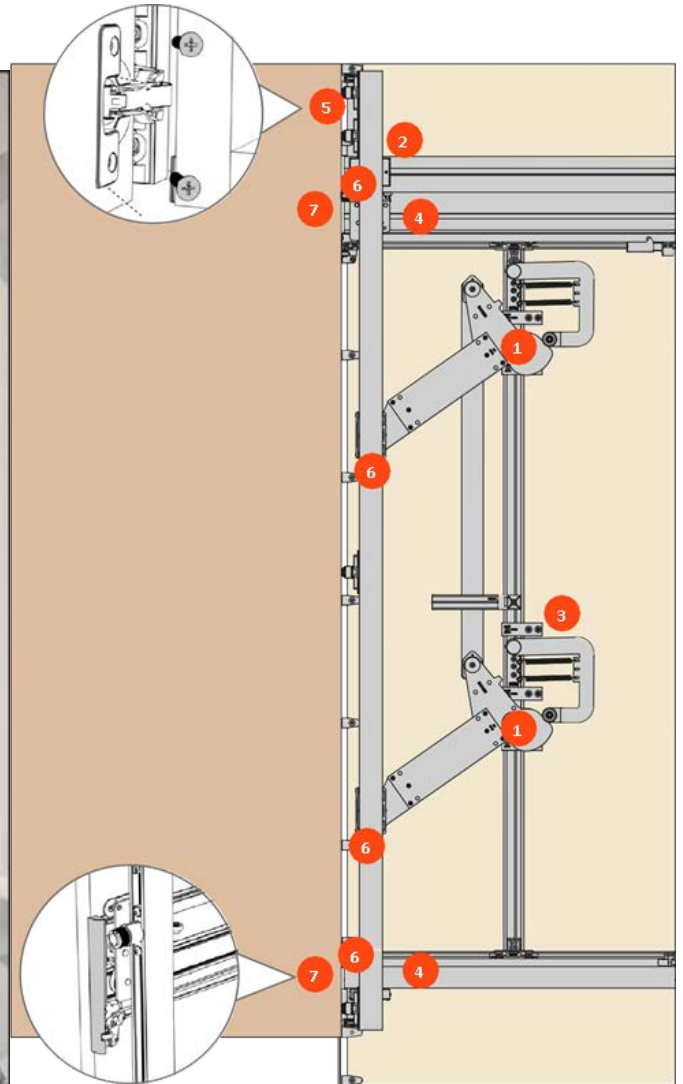

Maywood, IL
1401 St. Charles Rd.
Maywood, IL 60153
P: 708.343.1515
F: 708.343.1616

Rockford, IL
1931 Eleventh St.
Rockford, IL 61104
P: 815.968.0921
F: 815.968.4720


Indianapolis, IN
6350 Brookville Rd.
Indianapolis, IN 46219
P: 317.353.6281
F: 317.356.3503

White Bear Lake, MN
4250 Otter Lake Rd.
White Bear Lake, MN 55110
P: 651.407.2800
F: 651.407.2801



Horn Lumber
4700 West 19th St.
Cicero, IL 60804
P: 773.847.7397
F: 773.847.7798

EXEDRA - Pocket door order form
Details to be sent to order a pocket door mechanism made to measure

SALICE



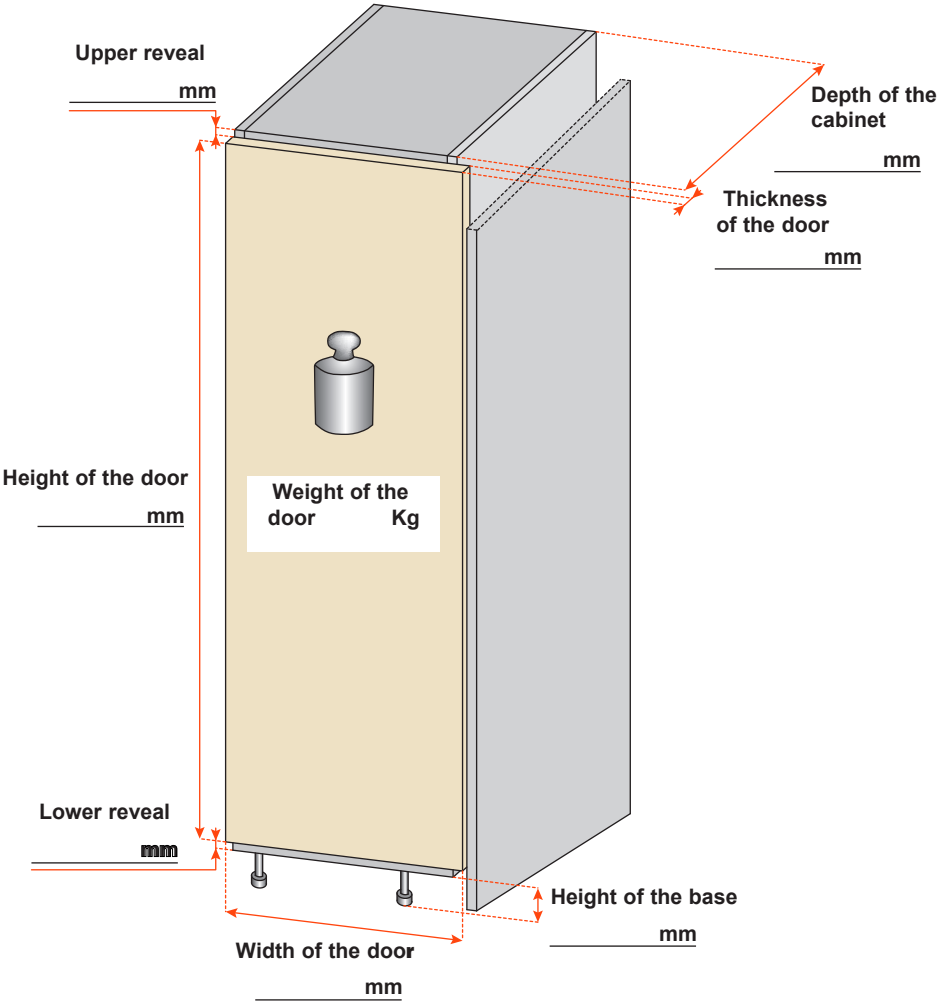


Opening direction:




Quantity of each:

Cover panel connector kit




Front cover kit




☐ ☐ ☐

Black Grey White

Smooth soft close kit for door



Roller kit for aluminum door or 5 piece wood door



Contact name
Company
Date
Project
Salice Distributor
Note



Mechanism characteristics

- Aluminium profiles: 6060T5 alloy, silver anodized.
- Components made of plastic, steel and zinc alloy.
- Mounting with clips to facilitate extraction of the mechanism in case of maintenance.
- Quick coupling hinges.

Door features

- Maximum weight for each door : up to 66 lbs (30 Kg) (with 5 of hinges allowed).
- Thickness: - min. 3/4" (19 mm) - max. 1-3/16" (30 mm).
- Width: - min. 15-3/4" (400 mm) - max. 35-7/16" (900 mm).
- Height: - min. 53-1/2" (1359 mm) - max. 98-7/16" (2500 mm).
- Door vertical adjustment: +4/-1 mm.
- Door horizontal adjustment: ± 2 mm.
- Door front adjustment: ± 4 mm.
- Cam-assisted door extraction movement.
- Standard projection of the door in open position: 107 mm (4-3/16") when allowed.
- Recommended space below door 5 mm (3/16")

Material: a) wood or derivatives;
b) metal and glass frame.

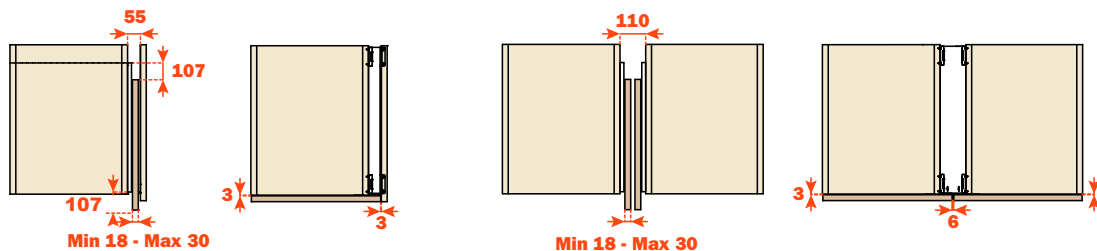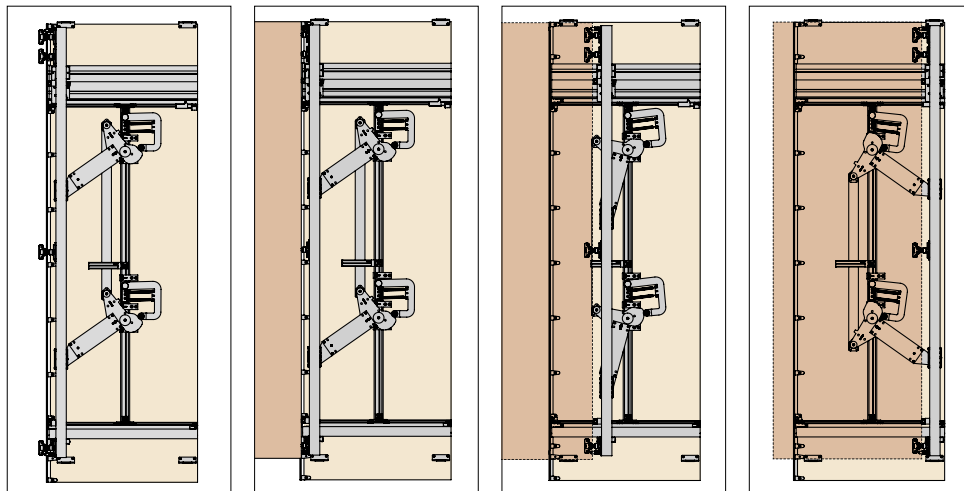

How to order the mechanism

- 1) Complete all the requested values in the section "cabinet dimensions" of the order form.
- 2) Choose the opening direction. Select the box "Right" or "Left".
- 3) Optional accessories:
 - "Cover panel connector kit"
 - "Roller kit for aluminum door or 5 piece wood door"
 - "Smove soft kit for door"
 - "Front cover kit": choose the color

Space required for the panel connector kit:

A minimum 14 mm above and 28 mm below the cabinet

B & C minimum 14 mm above and below the cabinet

Send the completed "order form" page to Salice America or Salice distributor.

